


**BANNER CONSTRUCTION DETAIL**

**NOTES:**

1. BANNERS THAT CONTAIN TELEPHONE NUMBERS, WEBSITES OR COMMERCIAL ADVERTISEMENTS SHALL NOT BE DISPLAYED OVER THE HIGHWAYS OF NEVADA.
2. THE PERMITTEE SHALL DELIVER THE BANNER TO THE TOWN OF GARDNERVILLE FOR REVIEW AND APPROVAL PRIOR TO THE BANNER BEING INSTALLED TO THE TOWNS FACILITY.
3. BANNERS MUST BE CONSTRUCTED OF A MINIMUM 18OZ VINYL BANNER FABRIC, WITH INNER CORE POLYESTER FIBER.
4. BANNERS SHALL BE 34 INCHES HIGH AND 40' IN LENGTH.
5. ALL BANNERS SHALL HAVE THE FOLLOWING:
  - 5/16" SPRING SNAP CONNECTORS AT 24 INCHES STAGGERED ON CENTER TOP AND BOTTOM, SEE DETAIL FOR SPACING
  - SEWN-IN POLYESTER WEBBING ON ALL EDGES.
  - REINFORCED CORNERS, BOTH FRONT AND BACK.
  - "O" OR "D" RINGS SEWN INTO THE WEBBING ON EACH CORNER.
  - 12" (OR LARGER) WIND HOLES STAGGERED AND SPACED APPROXIMATELY PER DETAIL.
7. BANNER SHALL BE KEPT IN GOOD REPAIR. THE PERMITTEE SHALL REPAIR THE BANNER PRIOR TO THE TOWNS RE-INSTALLATION OF THE BANNER AFTER NOTIFICATION OF THE PROBLEM.
8. BANNER WILL BE DELIVERED TO THE TOWN OF GARDNERVILLE, LOCATED AT, 1407 HIGHWAY 395 NORTH (775) 782-7134, NO LATER THAN THURSDAY OF THE WEEK PRIOR TO BANNER INSTALLATION.
9. SPRING SNAP CONNECTORS ARE TO BE, CORROSION RESISTANT, LOAD-RATED, ZINC-PLATED, STEEL SPRING SNAP RINGS ONLY.
10. 5/16" STEEL SPRING SNAP CONNECTORS SHALL HAVE THE FOLLOWING CHARACTERISTICS:
  - WORK LOAD LIMIT, 280lbs.
  - SNAP OPENING 1/2"
  - EYE DIAMETER 3/8"
  - OVERALL LENGTH OF 3 1/4"
  - (FASTENAL PART No. 12623-00386 OR EQUAL)

**SPECIAL NOTE:**

ALL BANNERS THAT ARE HUNG, MUST COMPLY WITH THESE TERMS AND CONDITIONS OR THEY WILL NOT BE INSTALLED.

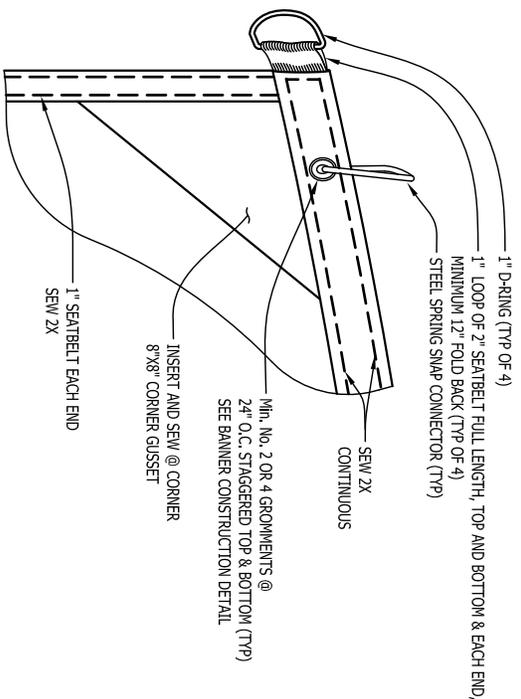

**TYPICAL CORNER DETAIL**