



LUMINAIRE SPECIFICATIONS:

CATALOG NO.: CP3243-AGPF-5SL4-64W-5K-120to277-RAL9005TX-PX-SQ
 GLOBE MATL: FROSTED POLYCARBONATE ACORN
 IES CLASSIFIC: TYPE 5
 WATTAGE: 54
 LIGHT SOURCE: LED
 LINE VOLTAGE: 120 AT 277 VOLTS
 DRIVER: MOUNTED ON A STAINLESS STEEL QUICK RELEASE TRAY ALL COMPONENTS SHALL HAVE MOLEX QUICK CONNECTORS.
 MOUNTING HARDWARE: SQUARE HEAD BOLTS
 IP66 WEATHERPROOF LUMINAIRE WITH "V" GROOVE SILICONE GASKET
 PHOTO CELL: TWIST LOCK TYPE, 120 VOLTS, INSTALLED IN FITTER - PX IF SHORTING CAP IS USED

#CP3243-AGPF-5SL4-64W-5K-120to277-RAL9005TX-PX-SQ
 GASKET ON (QUARTER TURN) SYSTEM ONLY
 PHOTOCELL MAY BE REQUIRED OR PRE INSTALLED SHORTING CAP (PX) WILL BE PROVIDED OR OTHER PER THE DIRECTION OF THE TOWN. (NVE CODE #28-0490)

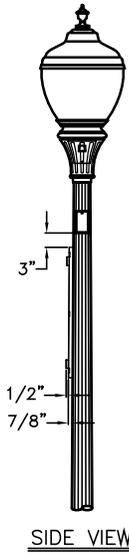

SIDE VIEW

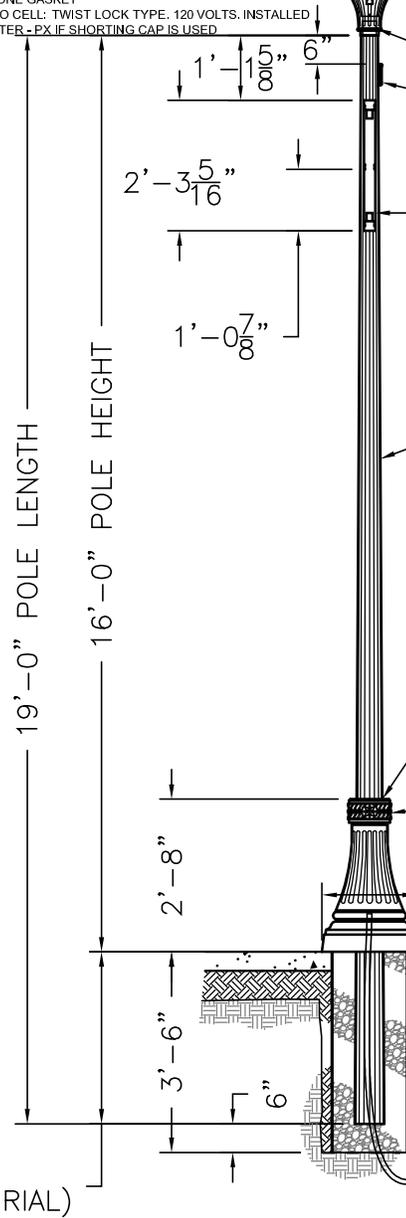

2 7/8" ϕ x 3" TENON
 15A, 120 V, GFI RECEPTACLE WITH WEATHER PROOF COVER (270° CW FROM HANDHOLE) ON POLES WITH HANGER OPTION ONLY
 POLES WITHIN GARDNERVILLE MAIN STREET DISTRICT ONLY SHALL PROVIDE CHRISTMAS DECORATION HANGER WELDED IN-PLACE (IN-LINE WITH HANDHOLE)

11 GA., 6 3/16" BASE DIA., GALVANIZED STEEL FLUTED TAPERED POLE 0.14"/FT. TAPER, VI-A20-F/19' (NVE CODE #28-1108)

PAINT SPECIFICATION
 ALL CAST IRON AND STEEL LIGHT POLE PARTS ARE TO BE FACTORY POWDER COATED "BLACK".

APPLY SILICONE SEALANT AT INSTALLATION

A20 VERTICALLY SPLIT BASE WITH REMOVABLE ACCESS DOOR (NVE CODE# 28-0130)

20" ϕ SIDEWALK

N9 BOX - JUNCTION BOX FOR POLE ELECTRICITY WITH POLYETHYLENE PIPE CONDUIT

16" ϕ x 42" TALL PVC TUBE, FILLED WITH 3/4" MINUS GRAVEL, COMPACTED, COMPACT TYPE II BASE BETWEEN NATIVE EARTH HOLE AND SONOTUBE

MANUFACTURE

DISTRIBUTOR

 29579 AWBREY LANE EUGENE, OREGON 97402 PHONE (541) 688-7741 FAX (541) 461-0951	 TEL 450 436 5500 FAX 450 436 3011	 105 Terminal Way Suite 202 Reno, Nevada 89502 (775) 333-0900
---	--	--



TOWN OF GARDNERVILLE
TOWN ROADS DECORATIVE LIGHT STANDARD

SECTION:	
DATE:	10/2011
DWG:	TOG-04